

# PRODUCT INFORMATION

## How to extend the life of your Hydraulic Motorcycle Lift

### 9 Top Tips

### to extend the life of your TradeQuip Hydraulic Motorcycle Lift Model 2101T

#### 1 Personal Safety

Correct PPE should always be worn whilst operating any Motorcycle Lift.



#### 2 Setting Up and Leveling the Lift

To ensure safe operation your TradeQuip Motorcycle Lift must be used on a flat level surface. The 2101T model has leveling adjusters that should be used in conjunction with a spirit level to achieve a safe level lift platform.



#### 3 Ensure Hydraulic Oil is at correct levels


Remove the filler bung and fill the reservoir with SAE 32 hydraulic oil to within 5mm to 10 mm below the filler hole. Replace the filler bung and test the jack throughout its entire stroke to ensure full stroke is achieved adding additional oil as required.

**Do Not Overfill.**



#### 4 Frame Pivots, Rollers, Wheels and Castors Lubrication

Wheels, Castors, Pivots, Pins and Rollers should be lubricated with a Light Bearing Grease or 30/40W Machine Oil to ensure long life, smooth operation and prevent premature wear.

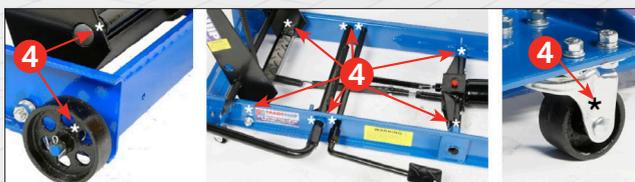

#### 5 Safety Locking Device

Your TradeQuip 2101T Motorcycle Lift comes with a Safety Device consisting of two pin holes per side of the lower rear fulcrum and the locking pin. For your safety this device must be used when any load is applied to the lift platform.



Raise to the desired height then insert the pin and operate the hydraulic release to take load onto the locking device assembly.

#### 6 Mounting Your Motorcycle

Do not use the leading plate to support the weight of the motorcycle when lifting. The leading plate is only used to assist with wheeling the motorcycle onto the platform when the lift is at its lowest level. Align the front or rear wheel within the wheel Jaws and close the Jaws until the motorcycle is held firmly in a vertical position.



#### 7 Hazards and Obstructions.

All wheeled TQB Brands equipment must be used on smooth surface free of cracks, crevices and tripping hazards that can foul the wheels during operation or relocation.

#### 8 Storage



#### 9 Read the user Manual thoroughly and

keep a copy easily accessible or visit our webpage [www.tqbbrands.com.au](http://www.tqbbrands.com.au) for instructional documents & pre-start videos.